


DPS ver 4 Installation guide

Typical configuration Optical node + Trunk amplifier


Introduction


Exploiting advanced technologies, Safecom's proven patented DPS4 turns existing coax lines into dynamic super power highways that provide total network backup. Based on the strategic placement of intelligent power management devices throughout the network, in the event of a power outage the DPS4 draws power from the nearest available source over existing coax or power cable.

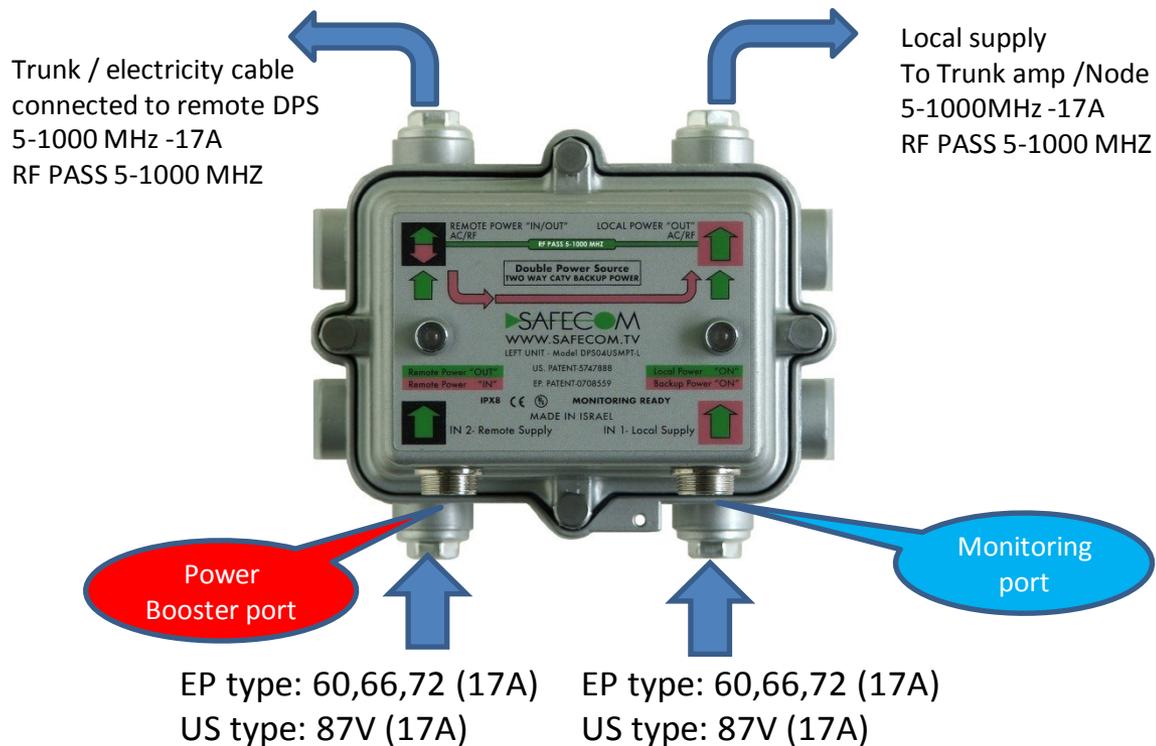


DPS ver 4 Installation guide

Typical configuration Optical node + Trunk amplifier

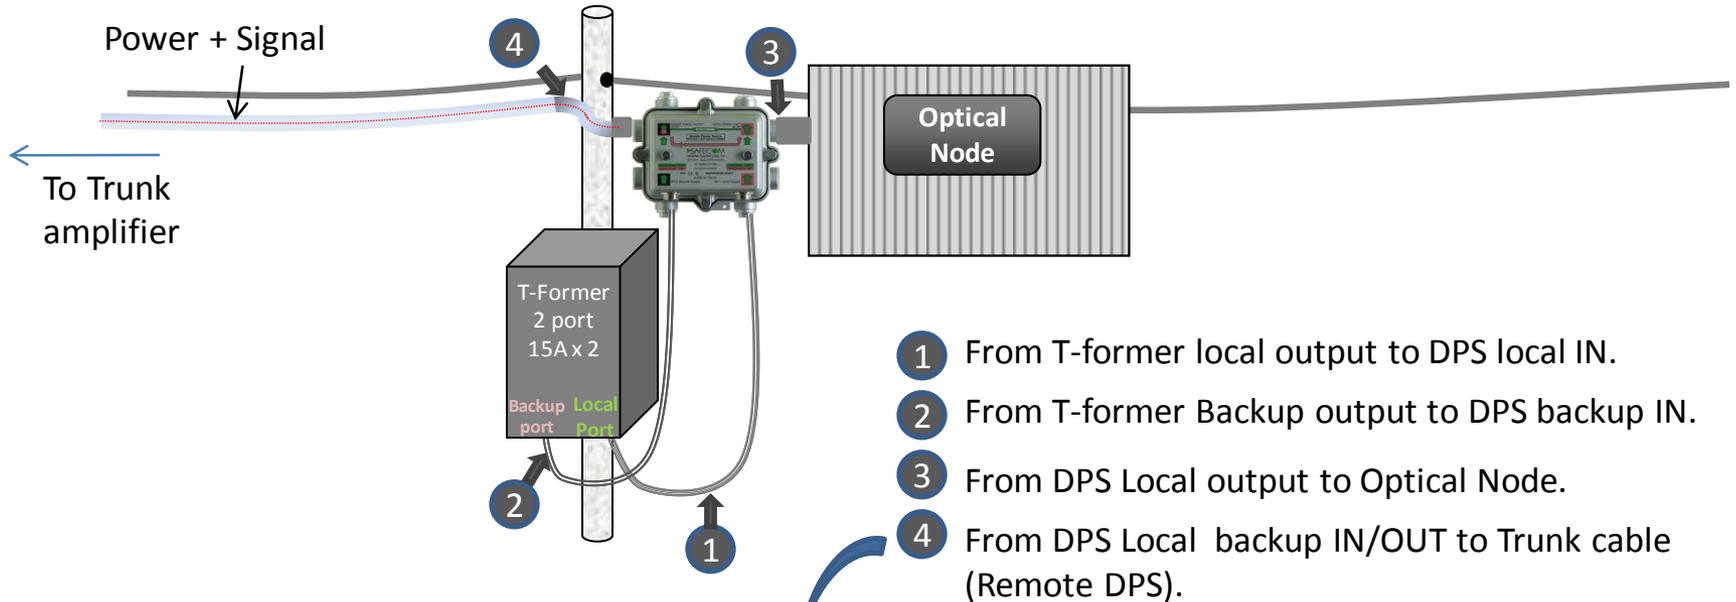

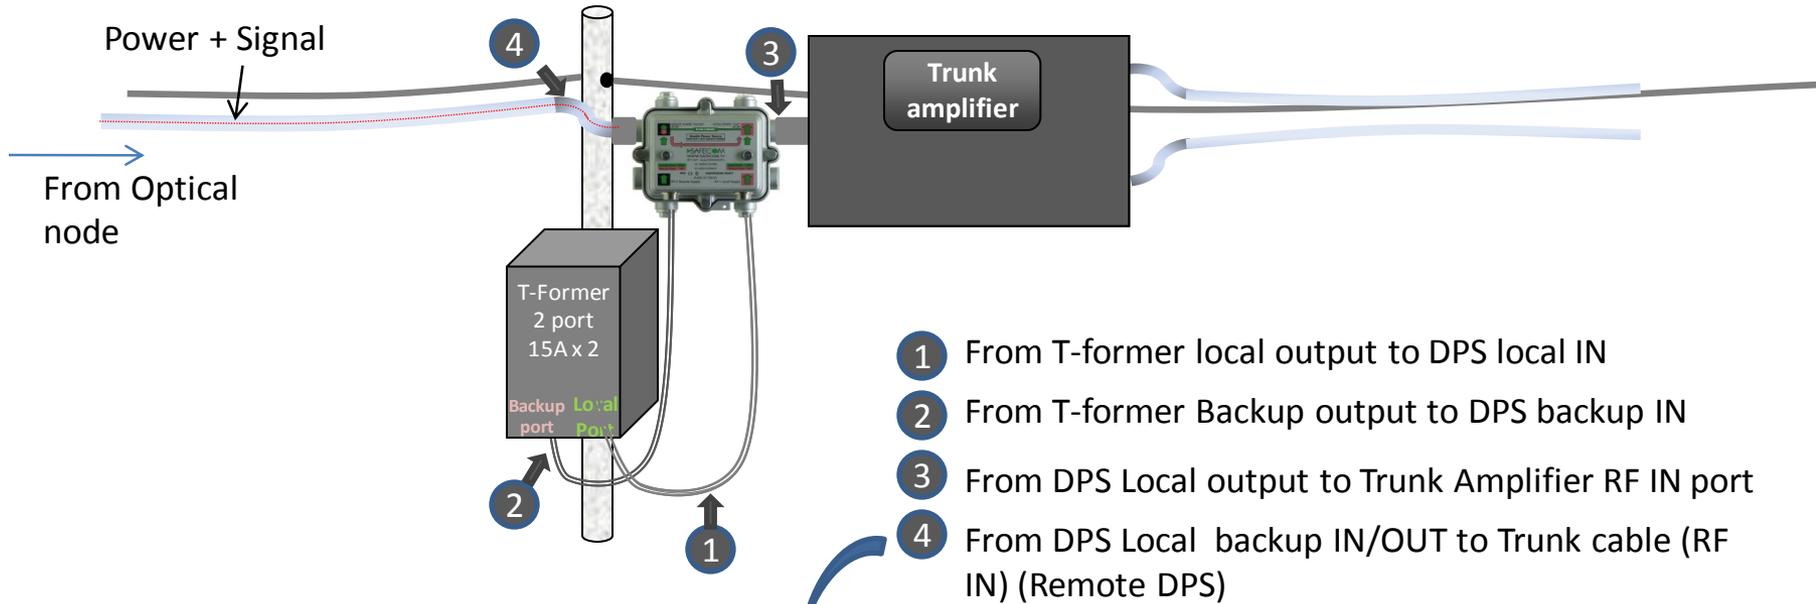

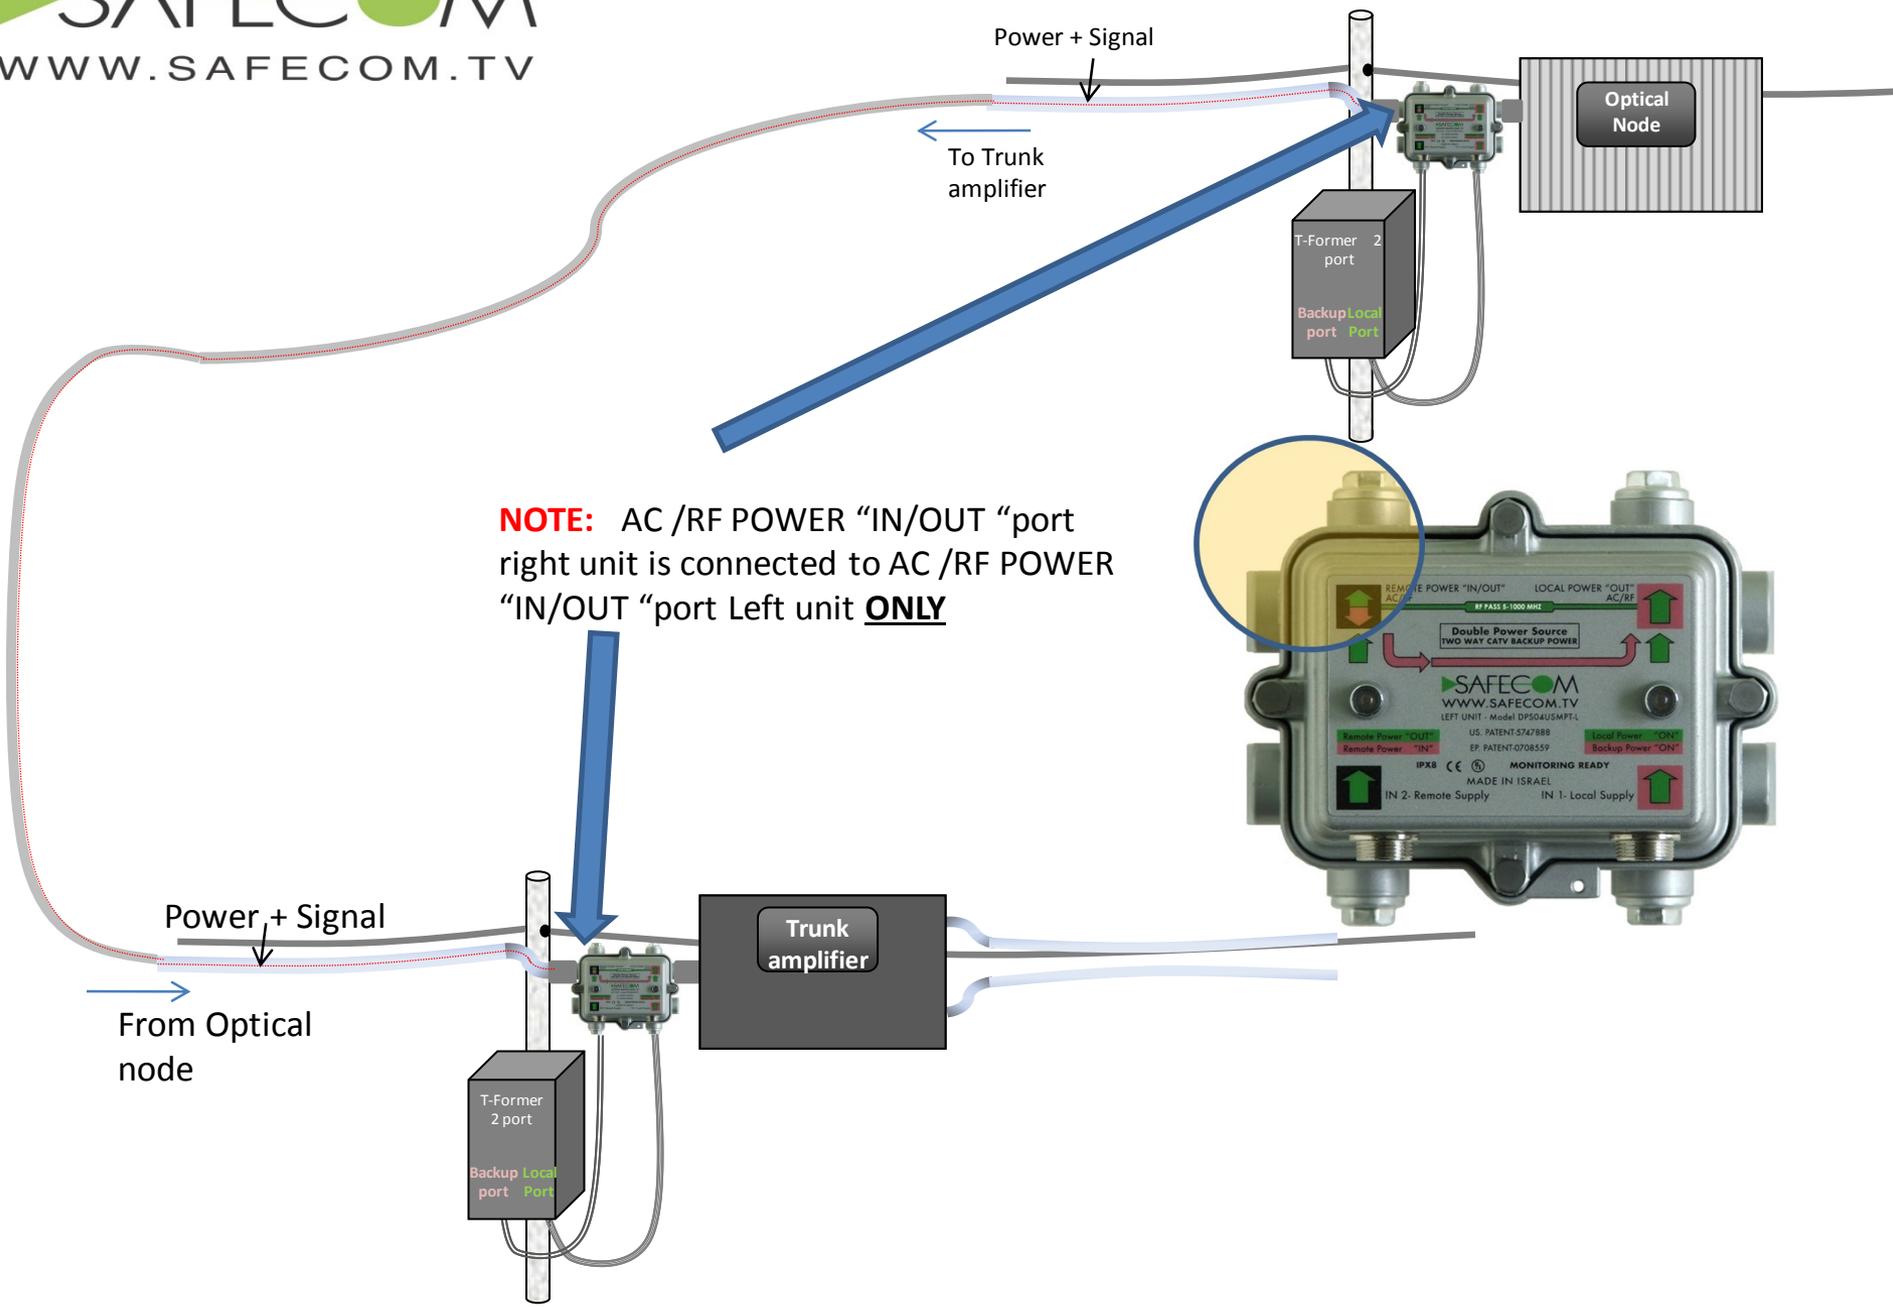

NOTE: AC /RF POWER "IN/OUT "port right unit is connected to AC /RF POWER "IN/OUT "port Left unit ONLY

Power + Signal


To Trunk amplifier

From Optical node

Trunk amplifier

T-Former 2 port
Backup Local port Port

Optical Node

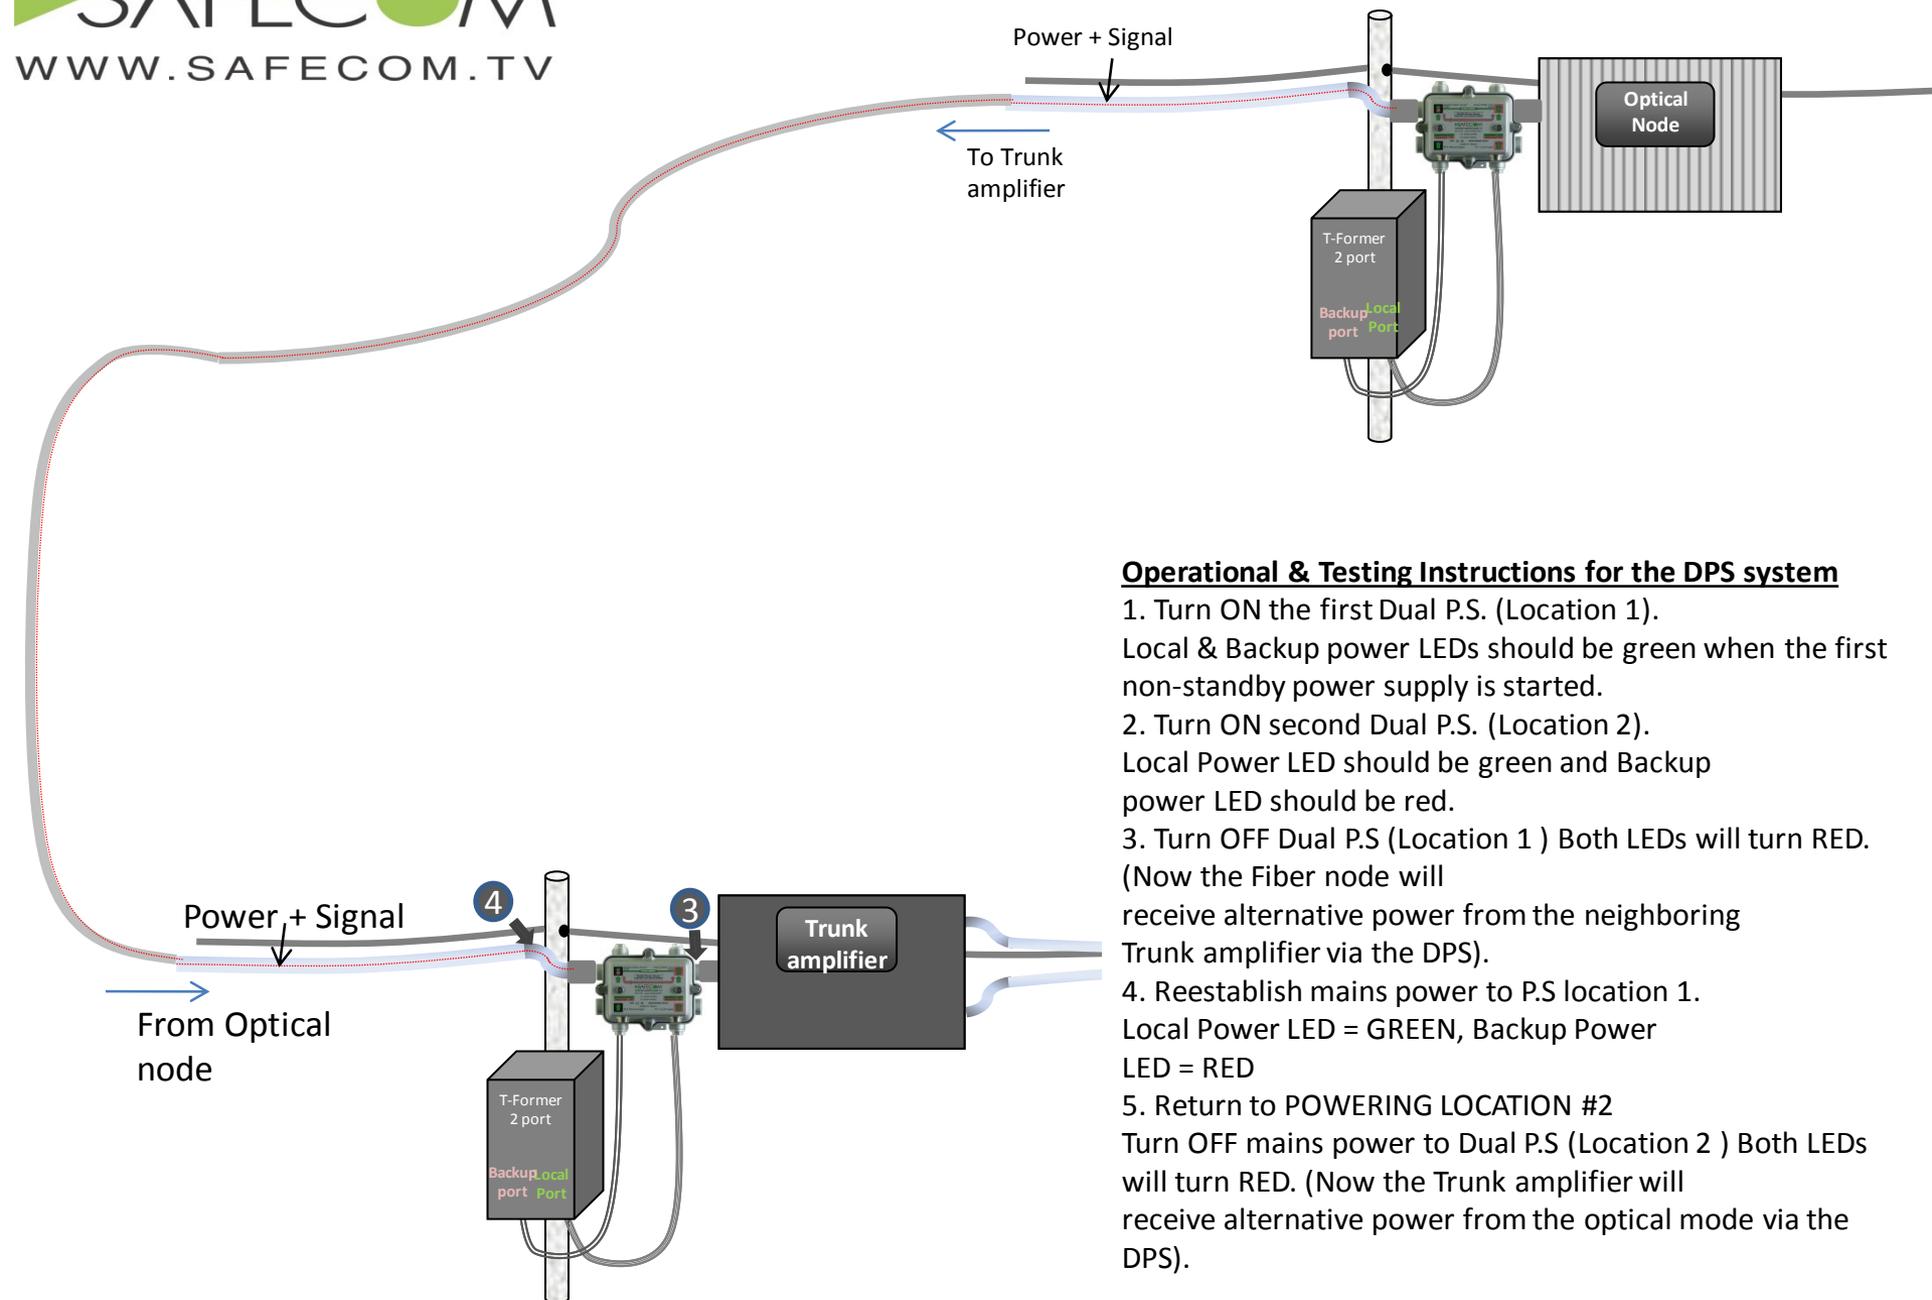

Operational & Testing Instructions for the DPS system

1. Turn ON the first Dual P.S. (Location 1).
Local & Backup power LEDs should be green when the first non-standby power supply is started.
2. Turn ON second Dual P.S. (Location 2).
Local Power LED should be green and Backup power LED should be red.
3. Turn OFF Dual P.S (Location 1) Both LEDs will turn RED.
(Now the Fiber node will receive alternative power from the neighboring Trunk amplifier via the DPS).
4. Reestablish mains power to P.S location 1.
Local Power LED = GREEN, Backup Power LED = RED
5. Return to POWERING LOCATION #2
Turn OFF mains power to Dual P.S (Location 2) Both LEDs will turn RED. (Now the Trunk amplifier will receive alternative power from the optical mode via the DPS).

Operational & Testing Instructions for the DPS system

1. Turn ON the first Dual P.S. (Location 1). Local & Backup power LEDs should be green when the first non-standby power supply is started.
2. Turn ON second Dual P.S. (Location 2). Local Power LED should be green and Backup power LED should be red.
3. Turn OFF Dual P.S (Location 1) Both LEDs will turn RED. Now the Fiber node will receive alternative power from the distant Trunk amplifier via the DPS.
4. Reestablish mains power to P.S location 1. Local Power LED = GREEN, Backup Power LED = RED
5. Return to POWERING LOCATION #2 Turn OFF mains power to Dual P.S (Location 2) Both LEDs will turn RED. (Now the Trunk amplifier will receive alternative power from the optical mode via the DPS).

Troubleshooting and repair:

The Power Booster is over current & short circuit protected.

If the Power Booster malfunctioning, the following tests should be done:

Disconnect the output coax and measure input & output voltage, if after 30 seconds the output voltage is not, the unit should be replaced.

If after the 30 seconds of start delay, the output voltage is as expected by specification, the network should be tested for short circuit or over-current.

Safety information:

Disconnect power from coaxial cable or electricity cable before installation.

Make sure DPS is well strength to holding cable at aerial installation or bracket at in close cabinet.

No need to open the front cover during installation, and there is no testing point or tuning inside the device.

Inspect the package if the unit was damaged, contact Safecom or the local distributor.

Return procedure

If the unit is not functioning, please contact your local distributor or directly to Safecom support through the web site at www.safecom.tv, support@safecom.tv .

The Safecom support team will review the information from the field, support the customer with any relevant info or technical instructions and approve RMA as needed.

